


that connects to batt neg



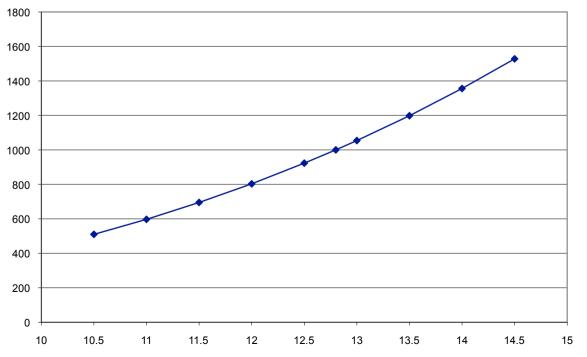

Red and black are 4 to 6mm² power cables.
Blue and brown are small cables for the coil current of some 30 mA.

You unplug the stock connector from the bulb and connect red and black to the bulb(s). The blue and brown connect to the connector you removed to give you high/low switching.

